


## 3 İletken, 4 Amper ve 30 Amper Kombinasyonu

## Model 331

| MODEL NO | İLETKENLER | TANIM                   | VOLTAJ AC/DC | 240 VAC VOLTAJDA AMPER SINIFI | MAX FREKANS MHZ | TEMAS DİRENCİ | MAX ÇALIŞMA RPM (dev/dak) | SICAKLIK MAX.F(C)/Min.F (C) | DEVİR TORK (gm/cm) | DEVRE KESİCİ |
|----------|------------|-------------------------|--------------|-------------------------------|-----------------|---------------|---------------------------|-----------------------------|--------------------|--------------|
| 331      | 3          | Standart Model          | 0-250        | 2@4/1@30                      | 100             | <1mΩ          | 1800                      | 140(60)/-20(-29)            | 200                | >25MΩ        |
| 331-SS   | 3          | Paslanmaz Çelik Yataklı | 0-250        | 2@4/1@30                      | 100             | <1mΩ          | 1800                      | 140(60)/-20(-29)            | 200                | >25MΩ        |

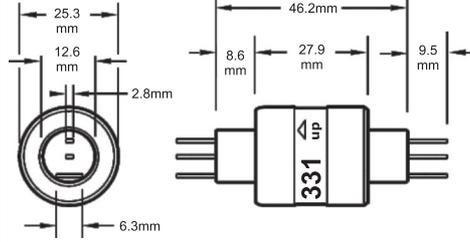

### ▼ Aksesuarlar




## 3 İletken, 30 Amper

## Model 330 & 335

| MODEL NO | İLETKENLER | TANIM                                 | VOLTAJ AC/DC | 240 VAC VOLTAJDA AMPER SINIFI | MAX FREKANS MHZ | TEMAS DİRENCİ | MAX ÇALIŞMA RPM (dev/dak) | SICAKLIK MAX.F(C)/Min.F (C) | DEVİR TORK (gm/cm) | DEVRE KESİCİ |
|----------|------------|---------------------------------------|--------------|-------------------------------|-----------------|---------------|---------------------------|-----------------------------|--------------------|--------------|
| 330      | 3          | Standart Model                        | 0-250        | 30                            | 100             | <1mΩ          | 1200                      | 140(60)/-20(-29)            | 300                | >25MΩ        |
| 330-SS   | 3          | Paslanmaz Çelik Yataklı               | 0-250        | 30                            | 100             | <1mΩ          | 1200                      | 140(60)/-20(-29)            | 300                | >25MΩ        |
| 335      | 3          | Yüksek Voltajlı Model                 | 0-500        | 30                            | 100             | <1mΩ          | 500                       | 140(60)/-20(-29)            | 700                | >50MΩ        |
| 335-SS   | 3          | Yüksek Voltaj Paslanmaz Çelik Yataklı | 0-500        | 30                            | 100             | <1mΩ          | 500                       | 140(60)/-20(-29)            | 700                | >50MΩ        |



**Yeni**

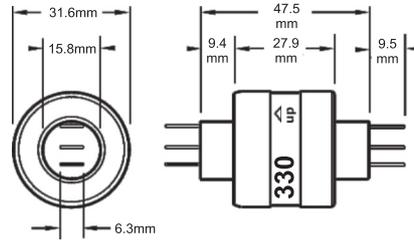


### ▼ Aksesuarlar



## 4 İletken, 4 Amper ve 30 Amper Kombinasyonu

## Model 430

| MODEL NO | İLETKENLER | TANIM                   | VOLTAJ AC/DC | 240 VAC VOLTAJDA AMPER SINIFI | MAX FREKANS MHZ | TEMAS DİRENCİ | MAX ÇALIŞMA RPM (dev/dak) | SICAKLIK MAX.F(C)/Min.F (C) | DEVİR TORK (gm/cm) | DEVRE KESİCİ |
|----------|------------|-------------------------|--------------|-------------------------------|-----------------|---------------|---------------------------|-----------------------------|--------------------|--------------|
| 430      | 4          | Standart Model          | 0-250        | 2@4/2@30                      | 100             | <1mΩ          | 1200                      | 140(60)/-20(-29)            | 400                | >25MΩ        |
| 430-SS   | 4          | Paslanmaz Çelik Yataklı | 0-250        | 2@4/2@30                      | 100             | <1mΩ          | 1200                      | 140(60)/-20(-29)            | 400                | >25MΩ        |

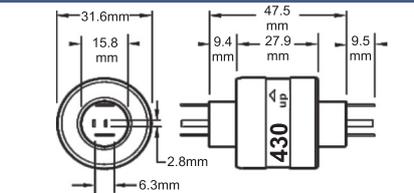

### ▼ Aksesuarlar

