



## Sample gas probe GAS 222.30 Ex2

In many applications gas analysis is the key for safe and efficient control of process flows, environmental protection and quality assurance. In extractive gas analysis the location of the gas sampling point is crucial for the reproducibility and accuracy of the analysis results.

The specific filter capacity, corrosion resistance and functional equipment requirements for the probe arise from the composition of the sample gas.

However, operating costs are also an important criterion in the selection, as the sampling points are frequently located at hard to access points in the system. Effective particle filter backwashing options and low maintenance characterise the extensive GAS probe series.

Versions with Atex and IECEx approval


Unheated probe with shut-off valve and upstream filter

For dust loads up to 200 g/m<sup>3</sup>, non-condensable gases

The probe is permitted for use in explosive areas




Flow chart

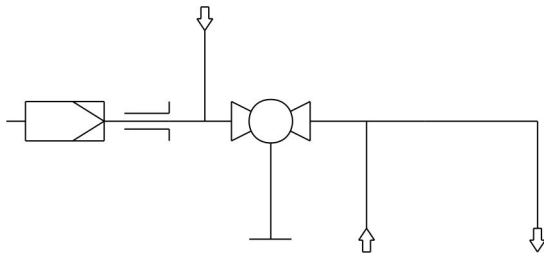

Technical Data

Gas Probe Technical Data

Ambient temperature without accessories:	-20 to +80 °C	
Ambient temperature for accessories:	<b>Component</b>	<b>Ambient temperature range</b>
	Valve for pressurized air:	-30 °C < T <sub>amb</sub> < +55 °C
	Solenoid valve for pneumatic actuator:	-10 °C < T <sub>amb</sub> < +55 °C
	Pneumatic actuator:	-20 °C < T <sub>amb</sub> < +80 °C
	Limit switch:	-25 °C < T <sub>amb</sub> < +60 °C
	Junction box:	-20 °C < T <sub>amb</sub> < +70 °C
Max. gas inlet temperature:	+195 °C (T3)/+130 °C (T4)	
Medium temperature (blowback):	<b>Component</b>	<b>Medium temperature range</b>
	Valve for pressurized air:	-10 °C to +80 °C
	Solenoid valve for pneumatic actuator:	-10 °C to +100 °C
Max. operating pressure	6 bar	
Material:	1.4571; ball valve 1.4408	
Parts in contact with media:	Seals: PTFE/graphite/1.4404 and see filter	
Markings:	ATEX:  II 3G Ex ec mb IIC T3/T4 Gc IECEX: Ex ec mb IIC T3/T4 Gc	



Dimensions

