


Copper Gasket

INFICON CF quality fittings are manufactured according to ISO 3669 and the latest TS/ ISO 3669-2 standard. INFICON Ultra high vacuum fittings are designed for applications down to 1×10^{-12} mbar and bakeout temperatures up to 400°C.



BENEFITS

- World wide logistics
- Design and measures follow strictly international respected standards
- Surface finish, welds, material specifications and cleanliness meet or exceed high vacuum specifications
- 2011/65/EU RoHS compliant

ORDER INFORMATION

Type	DN 16 CF	DN 40 CF	DN 63 CF	DN 100 CF	DN 160 CF	DN 200 CF
Copper gasket DN 100 CF; Set of 10 pcs				213-454		
Copper Gasket DN 200 CF; set of 10 pcs						213-456
Copper Gasket DN 250 CF; set of 5 pcs						
Copper Gaskets DN 160 CF; Set of 10 Pcs					213-455	
Copper seal DN 16 CF; set of 10 pcs	213-451					
Copper seal DN 300 CF; 1pc						
Copper seal DN 350 CF; 1 pc						
Copper seal DN 40 CF, set of 10 pcs		213-452				
Copper seal DN 63 CF; Set of 10 pcs				213-453		

SPECIFICATIONS

Type	DN 16 CF	DN 40 CF	DN 63 CF	DN 100 CF	DN 160 CF	DN 200 CF
Dimension A	2.1	2.1	2.1	2.1	2.1	2.1
Dimension B	21.3	48.1	82.4	120.5	171.3	222.1
Dimension C	16.2	39	63.6	101.8	152.6	203.4
Set of:	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.
Material:	Copper OFHC -/2.0040	Copper OFHC -/2.0040	Copper OFHC -/2.0040	Copper OFHC -/2.0040	Copper OFHC -/2.0040	Copper OFHC -/2.0040

213-457


213-458

213-459

SPECIFICATIONS

Type	DN 250 CF	DN 300 CF	DN 350 CF
Dimension A	2.1	2.1	2.1
Dimension B	272.9	326.2	376.5
Dimension C	254.2	307	357
Set of:	5 pcs.	1 pcs.	1 pcs.
Material:	Copper OFHC -/2.0040	Copper OFHC -/2.0040	Copper OFHC -/2.0040

DIMENSIONS

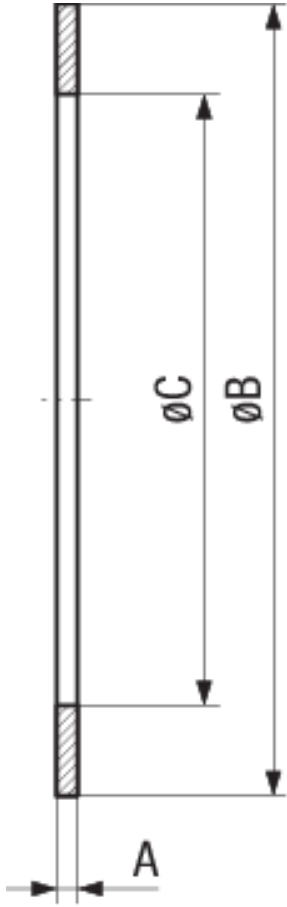

www.inficon.com reachus@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice.
RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2018-08) © 2018 INFICON