

Data Sheet for Precision Potentiometer

Conductive Plastic Potentiometer

Series MCP05



The MCP05 potentiometers in 13 mm housing with precision ball bearings and servo flange are suitable for applications where a precise miniaturized and long life sensor with precise mounting is important.

- Miniature housing with only Ø13 mm
- Ideal for confined spaces
- Servo flange for exact mounting
- 2 Precision ball bearings

The precision potentiometer series MCP05 is used as a precise and reliable miniature sensor for confined space conditions.

Electrical Data

Effective electrical angle of rotation 1.)	300° ±5°
Total resistance 1.)	0.5 kOhm up to 100 kOhm
Resistance tolerance	±10% (±15%)
Independent linearity (best straight line) 1.)	±1% (±2%)
Theoretical resolution 1.)	Nearly infinite
Backlash (Hysteresis) 1.)	≤ 0.5°
Max. / recommended wiper current 1.)	10 µA / 2 µA
Power rating @ 70°C (0W @ 105°C)	0,2 W
Insulation Voltage 1.)	500 VAC, 1min
Insulation Resistance 1.)	1000 MOhm @ 500 VDC

Mechanical Data, Environmental Conditions, Miscellaneous

Mechanical angle of rotation	360° without stop
Lifetime (90% el. eff. angle half sine) 2.)	10 Mio. rotations
Max. operational speed	400 rev. / min.
Bearing	2 x ball bearing
Operational torque @ ambient temperature 1.) 2.)	1 Nmm
Operating temperature range	-55 °C up to +105 °C
Storage temperature range	-55 °C up to +105 °C
Protection grade (IEC 60529)	IP40
Vibration (IEC 68-2-6, Test Fc)	15g 10Hz up to 2000Hz x 12h
Shock (IEC 68-2-27, Test Ea)	49g @ 11 ms x 18
Housing diameter	13 mm
Housing depth	12.5 mm
Shaft diameter	3 mm
Shaft type	Solid shaft
Max. radial load	≤1 N
Max. axial load	≤1 N

Data Sheet for Precision Potentiometer

Conductive Plastic Potentiometer

Series MCP05

Mechanical Data, Environmental Conditions, Miscellaneous

Connection type	Gold plated soldering pins
Connection position	Axial
Sensor mounting	Servo flange
Mass	ca. 5 g
Fastening parts included in delivery	3 servo clamps SFN3 with screw M1 1.6 x 3.5
Material shaft	Stainless steel
Material housing	Aluminium

1.) According IEC 60393

2.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

Please note: Max. permissible supply voltage <75 VDC respectively <50 VAC in addition the max. power rating must be observed

Order code

Description	Selection: standard=black/bold , possible <i>options=grey/italic</i>						
Series	MCP05						
Resistance value:							
<i>Option 500 Ohm</i>		<i>R500</i>					
1 kOhm		R1k					
<i>Option 2 kOhm</i>		<i>R2k</i>					
5 kOhm		R5k					
10 kOhm		R10k					
<i>Option 20 kOhm</i>		<i>R20K</i>					
<i>Option 50 kOhm</i>		<i>R50K</i>					
<i>Option 100 kOhm</i>		<i>R100K</i>					
<i>Option rear shaft:</i>							
<i>Standard Ø1,00 x 10 mm</i>				<i>RA</i>			
<i>Shaft length in mm</i>				<i>RAxx,xx</i>			
Resistance tolerance:							
±10%					W10%		
<i>Option ±15%</i>					<i>W15%</i>		
Independent linearity:							
±1,00%						L1%	
<i>Option ±2%</i>						<i>L2%</i>	
<i>Option center tap:</i>							<i>CT</i>
Option front shaft:							
Standard Ø3,00 x 11,5 mm							-
<i>Option Ø 3,175 x 11,5 mm</i>							<i>DM3,175</i>
<i>Option shaft length in mm</i>							<i>Ax,xx</i>
<i>Option shaft diameter in mm (≤3,175 mm)</i>							<i>DMx,xx</i>

For higher quantities or on-going demand, additional options are available as described below on request

For Example: With mech. end stop 310° @ 30 Ncm, special electrical angles of rotation, and special resistance and linearity tolerances. Furthermore we can mount gear wheels or attach cable assemblies with or without connectors and much more.


Data Sheet for Precision Potentiometer



Conductive Plastic Potentiometer


Series MCP05

Drawing

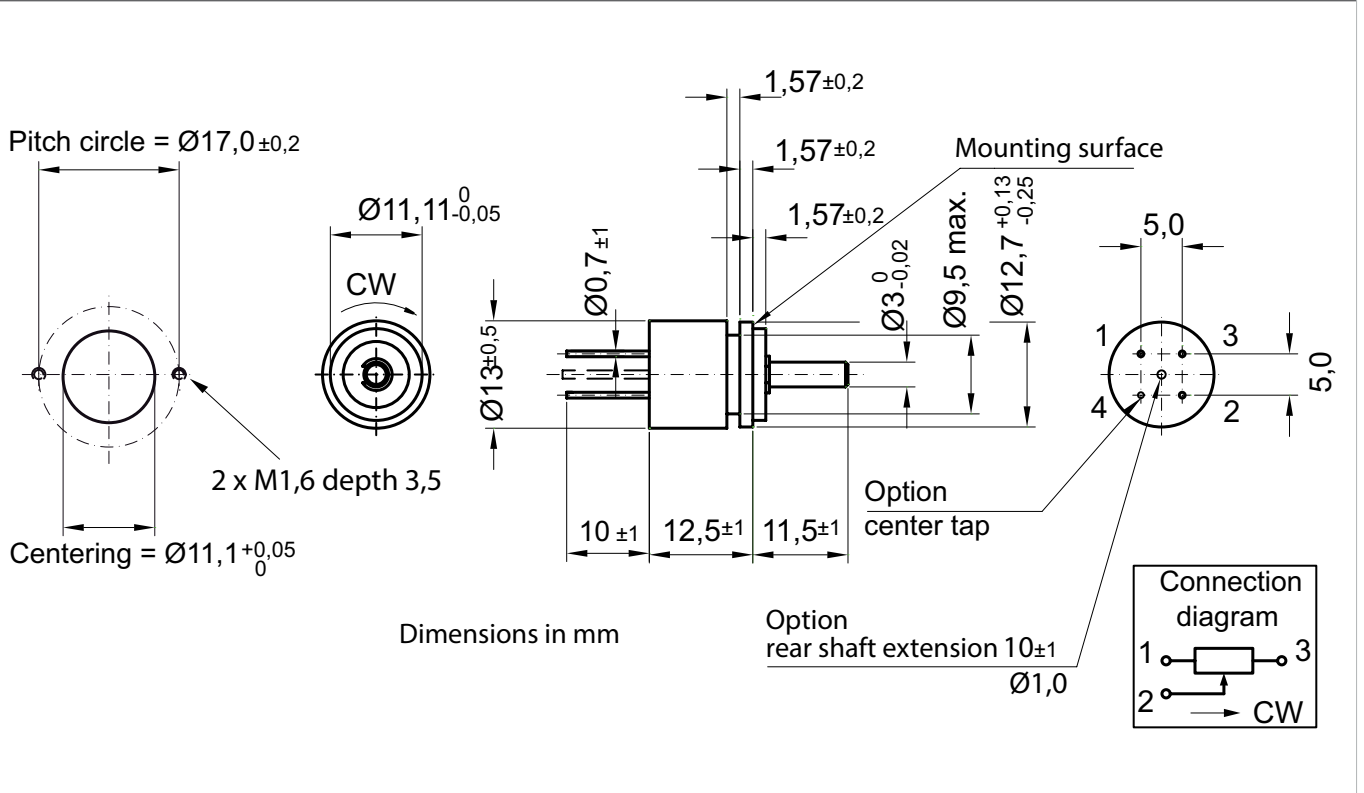


On Request: Special machining on shaft


Slot

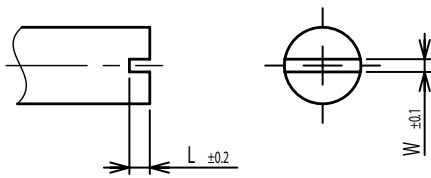


Groove

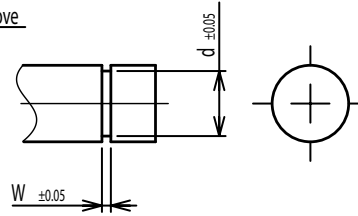


Flat

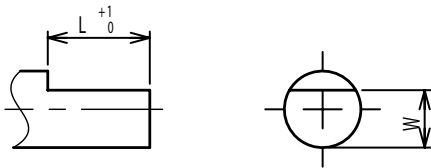


Round top

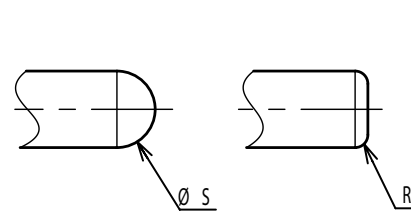


Double side flat

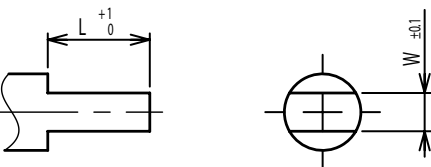


Counterbore hole

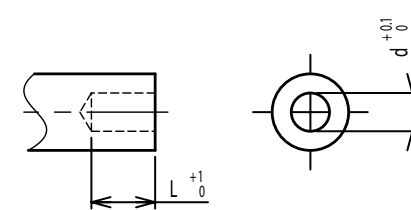


Step

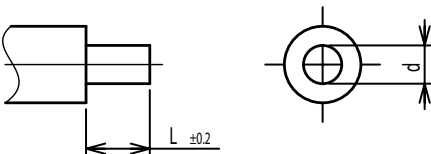


Counterbore screw hole

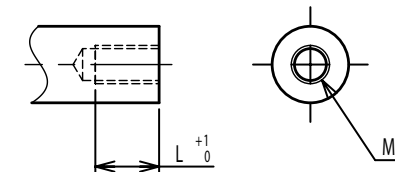


Screw Thread

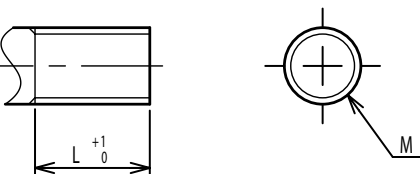

Pin hole

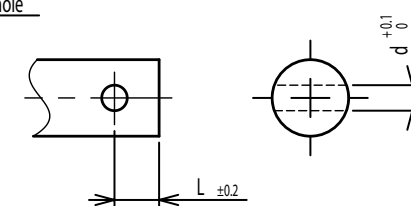

Knurled(Parallel)

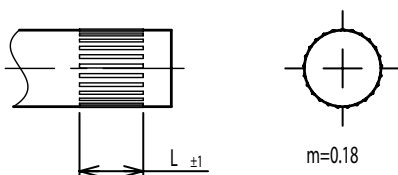

Screw thread inside hole

