



Sample gas probe GAS 222.20 Amex

In many applications gas analysis is the key for safe and efficient control of process flows, environmental protection and quality assurance. In extractive gas analysis the location of the gas sampling point is crucial for the reproducibility and accuracy of the analysis results.

The specific filter capacity, corrosion resistance and functional equipment requirements for the probe arise from the composition of the sample gas.

However, operating costs are also an important criterion in the selection, as the sampling points are frequently located at hard to access points in the system. Effective particle filter backwashing options and low maintenance characterise the extensive GAS probe series.

Heated probe with downstream filter, weather hood and terminal box

The downstream filter can easily be removed by turning the handle 90°

The probe body and the area around the screw connection for the heated sample gas line are completely isolated

Heater self-regulating to approx. 130 °C (T3)/70 °C (T4)


For dust loads up to 2 g/m³

This probe is suitable for use in explosive areas

C-US and CSA approval



Flow diagram

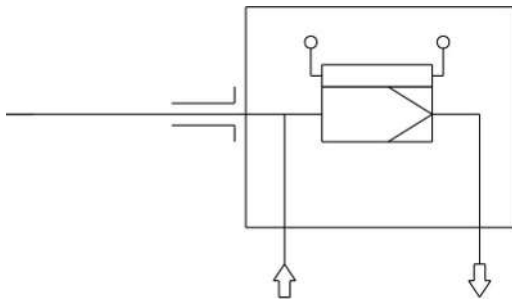

Technical Data

Gas Probe Technical Data

| | |
|------------------------------|---|
| Self-regulating temperature: | 130 °C (T3)/70 °C (T4) |
| Ambient temperature: | -20 to +80 °C |
| Low temperature alarm: | Contact open at operating temperature, closes at < 95 °C (T3) resp. < 50 °C (T4); U _{max} =30 VDC, I _{max} =100 mA, Ci/Li~0 |
| Electrical data: | 115 V-230 V, 50/60 Hz |
| Max. operating pressure: | 6 bar |
| Parts in contact with media: | 1.4571 Seals: Graphite/1.4404 and see filter |
| Explosion protection: | Class 1, Div 2, Gps B, C, D, T3 and T4 |

Ordering instructions

The item number is a code for the configuration of your unit. Please use the following model key:

| 4622220 | 1 | 6 | 6 | X | 3 | X | 0 | 0 | 9 | 9 | 9 | 9 | 9 | 9 | 9 | Product Characteristics |
|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-----------------------------------|
| | | | | | | | | | | | | | | | | Ex temperature classes |
| | | | | | 3 | | | | | | | | | | | T3 |
| | | | | | 4 | | | | | | | | | | | T4 |
| | | | | | | | | | | | | | | | | Sample probe power supply |
| | | | | | | 3 | | | | | | | | | | 115 / 230 V |
| | | | | | | | | | | | | | | | | Calibration gas connection |
| | | | | | | | 0 | | | | | | | | | No calibration gas connection |
| | | | | | | | | 1 | | | | | | | | 6 mm |
| | | | | | | | | | 2 | | | | | | | 6 mm + check valve |
| | | | | | | | | | | 3 | | | | | | 1/4" |
| | | | | | | | | | | | 4 | | | | | 1/4" + check valve |

Options

The base unit becomes functional by adding accessories suitable for the application. Please refer to accessory data sheet no. 461099 for information.

Please also refer to data sheet no. 461000 "GAS 222 Gas Probes" for a general description.

Dimensions

