




- Measuring length 100 - 5000 mm
- Profinet protocol
- 24 VDC power supply




Technical Specifications	
Measurement stroke	100 - 5000 mm
Resolution	25µm (100mm-400mm), 50µm (450mm-3000mm), 100µm (4000mm-5000mm)
Repeatability	100 µm
	Profinet
Power supply	24 VDC ±10%
Displacement speed	max. < 5 m/s
Max. consumption	<100 mA (depending on stroke length)
Linearity	100 mm < %1, 100-300 mm < %0.2, 300-500 mm < %0.1, 500-5000 mm > %0.05
Reverse polarity protection	Up to -30 VDC
Overvoltage protection	Up to +30 VDC
Response time	1 ms
Interface	Profinet IO
Protocol	Profinet Ethernet 100 Base-TX to IEEE 802.x
Data-length	16 bit
Data transmission rate	100 Mbit/s max.
Diagnostic LEDs	Green LED : Power on, BUS communication active Red LED : Error, Stop mode
Protection level	IP 65
Operating temperature	-20°C ... +80°C
Storage temperature	-30°C ... +90°C


**Mechanical Specifications**

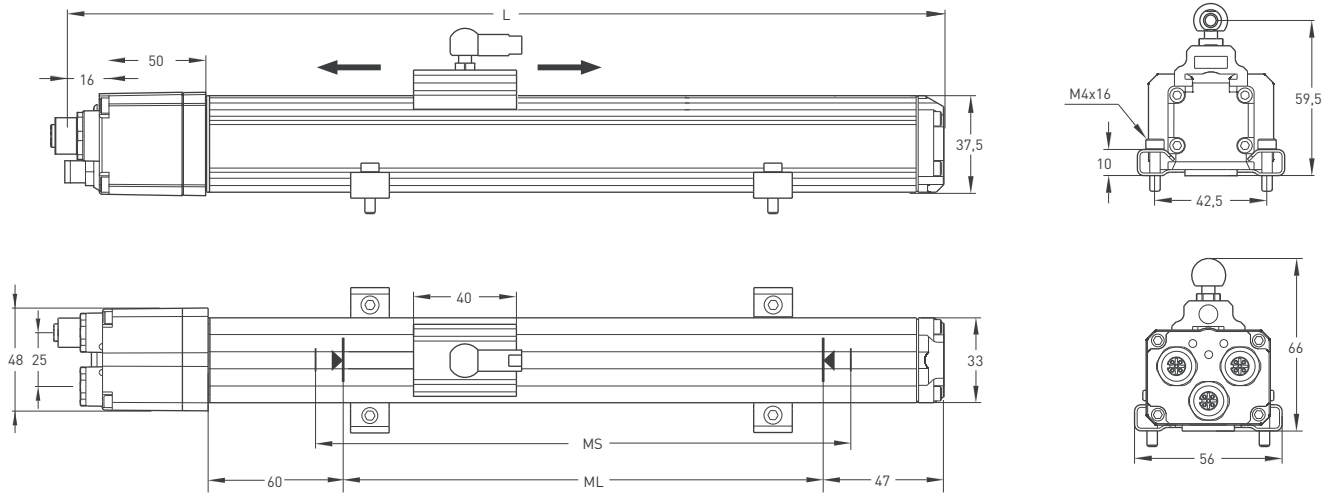

DMSW (mm)	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	1000	1100	1200	1300	1400	1500	1750	2000	2250	2500	3000	4000	5000			
ML (Measuring Length)	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	1000	1100	1200	1300	1400	1500	1750	2000	2250	2500	3000	4000	5000			
MS (Installation Length)	198	248	298	348	398	448	498	548	598	648	698	748	798	848	898	948	998	1098	1198	1298	1398	1498	1598	1848	2211	2461	2711	3211	4211	5211			
L (Total Length)	361	411	461	511	561	611	651	711	761	811	861	911	961	1011	1061	1111	1161	1261	1359	1461	1561	1661	1761	2011	2348	2590	2848	3348	4348	5348			
Dead Zone Calculation	103/47																																

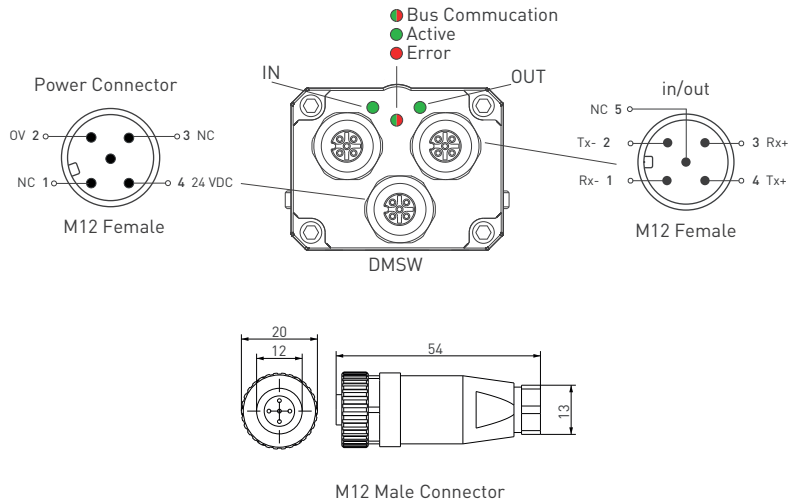

Cursor

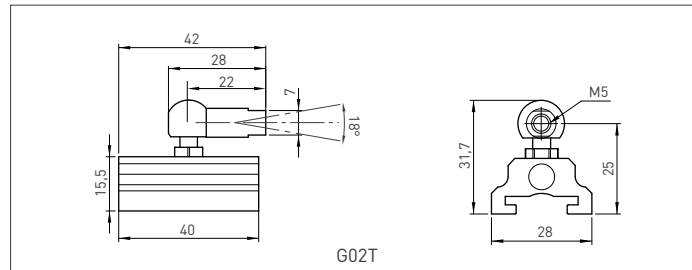

Ordering Procedure

Model	Measurement stroke	Protocol	Cursor	Connecting brackets	Dead zone
DMSW	150	PFN	G02T	BR02	103/47
DMSW	100 - 5000 mm	PFN: Profinet	1G02T: 1 cursor 2G02T: 2 cursors	BR01 BR02	≤ 2000 mm 103/47 > 2000-3000 mm 145/47 > 3000-4000 mm 175/47 > 4000-5000 mm 215/47

\* T-coded sensors are used with T-coded cursors.